

SYNCHRONOUS BELTS

INDUSTRIAL BELTS

498-2207A
Effective Date: 01 January 2008

LONG-LENGTH BELTINGS

MARKETS / APPLICATIONS


Uniquely suited to all industrial application requiring a rack & pinion driving arrangement.

FEATURES / ADVANTAGES

- Length stability
- Low noise
- Accurate positioning
- No lubrication
- Low maintenance
- Linear movement

Notes

Continuous lengths (if needed) must be specified when ordering.

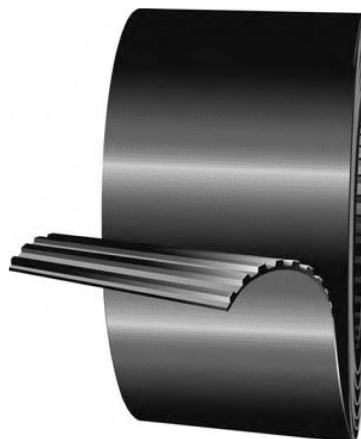

POLY CHAIN® GT



	Pitch (mm)	T (mm)	B (mm)	Length on Roll (m)	Width (mm) Aramid
8MGT	8.00	3.40	5.90	30	12,21,36
14MGT	14.00	6.00	10.20	30	20,37

POWERGRIP® GT



	Pitch (mm)	T (mm)	B (mm)	Length on Roll (m)	Width (mm)	
					Glass fibre	Steel
3MR	3.00	1.12	2.41	30	6,9,15	6,9,15
5MR	5.00	1.92	3.81	30	6,10,15,25	6,10,15,25
8MR	8.00	3.34	5.60	30	10,15,20,30,50	10,15,20,30,50

POWERGRIP® HTD®



	Pitch (mm)	T (mm)	B (mm)	Length on Roll (m)	Width (mm)	
					Glass fibre	Steel
3M	3.00	1.10	2.40	30	6,9,15	6,9,15
5M	5.00	2.10	3.80	30	6,10,15,25	6,10,15,25
8M	8.00	3.40	6.00	30	10,15,20,30,50,85	10,15,20,30,50,85
14M	14.00	6.00	10.00	30	25,40,55,85,115	25,40,55,85,115

POWERGRIP®



	Pitch (mm)	T (mm)	B (mm)	Length on Roll (m)	Width (mm)	
					Glass fibre	Steel
XL	5.080	1.27	2.30	30	025,031,037,050	025,031,037,050
L	9.525	1.91	3.60	30	037,050,075,100	037,050,075,100
H	12.700	2.29	4.30	30	050,075,100,150,200,300	050,075,100,150,200,300

** Widths in stock are printed in bold. Other lengths and widths available upon request

** Long Length belt are supplied in standard rolls of either 30m/50m/60m/90m/100m

** Long Length belts are supplied in different standard rolls depending on the belt width

** Poly Chain Long Length belts are supplied in standard rolls of minimum orders of 50Ft/ roll

** MOQ applies

Long Length Ordering Code

Example : LL-8M-20

LL : Long Length

8M: Pitch HTD® 8mm

20 : 20mm Belt width